(12) EUROPEAN PATENT APPLICATION

(71) Applicant: STANDARD TELEPHONES AND CABLES
PUBLIC LIMITED COMPANY
190 Strand
London, WC2R 1DU(GB)

(72) Inventor: Wong, Andrew Chi-Chung
43 Copse Hill
Harlow Essex(GB)

(72) Inventor: Fearnhead, Graham Roy
14 Mansfields Writtle
Chelmsford Essex(GB)

(72) Inventor: Gale, Simon John
53 Thornberra Gardens
Bishop's Stortford Hertfordshire(GB)

(74) Representative: Dennis, Mark Charles
STC Patent Department Edinburgh Way
Harlow Essex CM20 2SH(GB)

(54) Digital navstar receiver.

(57) A NAVSTAR receiver in which the received signals are processed to produce digitised quadrature signals (I,Q) at zero i.f. Baseband phasor rotation to effect Doppler tracking in the receiver loop is accomplished by deriving digital signals representing $\sin \omega T$ and $\cos \omega T$ for the required rotation angle ωT, multiplying the quadrature signals separately and summing the outputs according to the algorithm $I^1 = I \cos \omega T + Q \sin \omega T$ and $Q^1 = Q \cos \omega T - I \sin \omega T$, where I & Q are the digitised quadrature signals.

EP 0 155 776 A1

5

10   DIGITAL NAVSTAR RECEIVER

          This invention relates to receivers for the
Navstar satellite navigation system.
          Navstar is a satellite navigation system which
15   is planned to give continuous worldwide all-weather
coverage, providing highly accurate, three-dimensional
position and velocity information.
          The complete Navstar system is planned to
consist of 18 satellites arranged in nearly circular
20   orbits with radii of 26,600km, and an inclination to the
earth's equatorial plane of 55 degrees.   Each satellite
transmits two navigation signals, designated L1 and L2
and centred at 1575 and 1228MHz respectively.
          Both signals convey ranging information by means
25   of modulations which are locked in time to atomic
standards.   The forms of these modulations (which are
known as pseudorandom codes because they appear random,
but are nevertheless well defined) are unique to each
satellite.
30   By measuring the phases of the received codes
against a clock in the receiver, together with the
Doppler shifts of the radio frequency carriers, a user
can calculate the range and range rate to a particular
satellite by monitoring four satellites (Fig. 1).   By
35   decoding data about their motions which are also
modulated on to the transmitted signals, the user may
solve equations (Fig. 2) to determine his

three-dimensional position and velocity and also apply corrections to his clock, making it conform to satellite time.

Alternatively, if he is constrained to move on the surface of the earth or is at known altitude, he may make two-dimensional measurements using three satellites. The software controlling the receiver must choose from the satellites in view the subset which gives the most favourable geometry for the navigational calculations.

Two pseudorandom codes are in fact transmitted by each satellite. The first of these is used to aid acquisition of the satellite signals and to provide coarse navigation, and hence is called the Coarse/ Acquisition (C/A) code. The second has a 10-times higher modulation rate which yields the full navigational accuracy of the system, and is designated the Precision (P) code.

A basic Navstar receiver typically contains a low-noise amplifier and down-converter to a convenient IF, followed by one or more code and carrier tracking channels, each capable of tracking the transmissions from any satellite. There is also associated range and range-rate measurement circuits.

The purpose of the code tracking loop is to keep a code generator in the receiver in step with a received pseudorandom sequence, and hence provide information on the range to the satellite being tracked.

To obtain a position and velocity estimation, a receiver must be locked to the transmissions from a number of satellites. Consider the case of a complete three-dimensional estimation for which the required number is four, as depicted in Figure 1. Four measurements of "pseudo-range" are made by locking code tracking loops to the received signals and then timing the occurrence of certain states of the code generators within the loops with the aid of the receiver's clock.

The measurements are of "pseudo-range" rather than true range because of the (as yet) undetermined receiver clock offset.

Similarly, by measuring the frequencies of the carrier tracking loop voltage-controlled oscillators over gating times determined by the receiver clock, four measurements of "pseudo-range rate" are obtained. These are in error from the true range rates because of the clock's frequency error. All these measurements, together with data from each satellite which provides information about satellite motion, then enable a navigational solution to be obtained. This relies on the fact that four observations are required to solve for four unknowns.

According to the present invention there is provided a receiver for a Navstar satellite navigation system including amplification and down conversion to i.f. frequencies to produce quadrature signals, analogue-to-digital converters to digitise separately the quadrature signals, local digital code generating means, means for correlating the digitised quadrature signals separately with the same locally generated digital codes, channel signal processing means to which the outputs of the correlation means are applied, the processing means being arranged to control the code and carrier tracking of the receiver, and correction means responsive to control signals generated in the processing means to effect phase rotation of the baseband signal phasor represented by the digitised quadrature signals to effect Doppler tracking in the receiver loop, characterised in that the correction means includes means for generating digital signals representing $\sin \omega T$ and $\cos \omega T$, where ωT is the required phase rotation angle, means for multiplying each of the quadrature signals by the $\sin \omega T$ and $\cos \omega T$ signals separately and means for summing the multiplied signals according to the algorithm

$$I^1 = I \cos \omega T + Q \sin \omega T$$
$$Q^1 = Q \cos \omega T - I \sin \omega T$$

where I and Q are the digitised quadrature signals.

Fig. 3 shows a generalised Navstar receiver architecture. Signal is taken in at L-band and passed through successive stages of amplification and down-conversion at r.f., i.f. and zero i.f. frequencies. At some point in the chain, the signal will have to go through an analogue to digital interface, to allow information extraction by a digital processor. If the code and carrier loops are closed in software, this processor would also provide the necessary feedback control signals.

There are a number of possible positions at which code and carrier (Doppler) injection can take place: at i.f. baseband analogue, or baseband digital. Beyond the injection point in the receiver chain, the circuit becomes dedicated to the reception of signals from a particular satellite. Hence, for reception of transmissions from several satellites, the circuitry after this point has to be duplicated by the number of satellites intended, or alternatively, be time-shared (cycled or multiplexed) between the same number. Therefore, in order to reduce circuit complexity, the injection point should be pushed as far back in the chain as possible. The furthest point that this process can be effected is by performing both code correlation and Doppler correction at digital baseband.

Other considerations can also be put forward to favour a baseband solution. By performing code correlation at baseband, true multipliers can be used instead of mixers, thus avoiding the problem of mixer leakages. The stability and Q-factor of the filters required to define the pre-correlation bandwidth would demand quite stringent specifications at i.f. The problem is considerably eased by performing low-pass filtering at baseband. Also, the need to use multiple

transfer loops in the synthesiser to implement i.f.
Doppler injection can be avoided.

An embodiment of the invention is now described
referring to Figs. 4-6 of the drawings wherein·

Fig. 4 illustrates the effect of Doppler shift,

Fig. 5 illustrates a phase rotation circuit, and

Fig. 6 illustrates a numerically controlled
oscillator.

The possibility of providing digital Doppler
correction at baseband is highly desirable as this will
permit the use of a single fixed frequency
down-conversion to zero i.f. followed by a single pair of
A/D converters, irrespective of the number of receiver
channels required.

In order to represent the signal phasor at
baseband, In-phase (I) and Quadrature (Q) channels are
necessary with the I and Q channels denoting the real and
imaginary components of the phasor. Any Doppler shift
will cause the phasor to rotate and so produce a Doppler
loss if filtering is implemented by accumulation of
successive phasor samples. This effect is shown in
Fig. 4. The rotation must therefore be removed or
considerably reduced before appreciable accumulation may
take place.

The signal vector may be expressed in
exponential form thus·

$$\hat{S} = Ae^{j(\omega NT + \phi)} \qquad\qquad N = 0,1,2 \ldots$$

where A is the signal amplitude, ω is the Doppler
frequency, T the sample interval, and ϕ is an arbitrary
angle.

In order to remove the phase rotation, the
signal vector must be multiplied by a counter-rotating
unit vector thus·

$$\hat{S}' = Ae^{j(\omega NT + \phi)} \cdot e^{-j\omega NT} = Ae^{j\phi}$$

The phasor will now appear to be stationary and may be accumulated in time without loss.

The practical implementation of the counter-rotation function on the I and Q channels may be easily appreciated by expressing the multiplication in real and imaginary parts thus:

$$(I+jQ) (\cos \omega NT - j \sin \omega NT)$$
$$= \underbrace{I \cos \omega NT + Q \sin NT}_{I'} + \underbrace{jQ \cos \omega NT - jI \sin \omega NT}_{Q'}$$

The transformation is effected by the circuit arrangement shown in Fig. 5. The digitised quadrature signals I & Q, representing the real and imaginary components of the phasor, are first fed to respective correlators 50a, 50b where they are correlated with locally generated code signals. The correlated signals are then subjected to partial accumulation in accumulators 51a, 51b to reduce the data rate before feeding to the phase rotation circuitry. The channel processor (not shown) calculates the rotation frequency to be applied to correct the Doppler loss in the received signal. This rotation frequency is fed to a numerically controlled oscillator (NCO) 52 which derives a phase rotation angle ωT required to effect the necessary phase rotation of the signal vector. The NCO is conveniently of the form shown in Fig. 6 and comprises a clocked shift register 61 acting as an accumulator to which is fed a digital word, say $\approx$ 21 bits (representing a positive or a negative rotation frequency). The accumulator has a feedback summed with the input. The phase rotation angle is represented by a shorter M-bit digital word, say 6 bits) taken from an intermediate stage of the accumulator. The word length required will be determined by the maximum phase noise that may be tolerated from the rotation operation. The resultant phase noise will be

given by evaluation of the rms quantisation noise. If 6 bits are used a phase quantisation of 0.098 radians will result with an associated rms phase noise, σ_ϕ, of·

$$\sigma_\phi^2 = \frac{0.098^2}{12}$$

giving σ_ϕ = 0.028 rad. rms.

This value will typically be well below the thermal noise expected in Navstar phase tracking loops.

The frequency range and resolution of the NCO must be adequate to cover the complete expected Doppler range in steps small enough to prevent significant phase errors accumulating between NCO updates. A Doppler range of ± 10 kHz will be more than adequate as this will encompass the full satellite Doppler range of $\approx \pm 4$ kHz together with a user velocity range of $\pm$Mach 3.8. In considering the frequency resolution of the device it may be assumed that the NCO will be updated at an effective rate of approximately twice the loop bandwidth. Thus for a narrow bandwidth case with an update rate of about 1 Hz a frequency resolution of 0.01 Hz will permit a worst case phase error of ≈ 0.06 radians to accrue. This is consistent with the phase noise given above. The number of bits required to control the NCO is therefore defined as·

$$\log_2 (20.10^3/0.01) \approx 21 \text{ bits.}$$

The NCO must also be clocked at a sufficiently high rate to prevent jitter on the phase ramp output occurring. This jitter is produced as a consequence of the oscillator only producing a finite number of output samples per output cycle. The problem is therefore worst at the highest output frequency. In order to reduce this effect to the level of the phase quantisation, therefore, approximately 64 output samples per output cycle will be required. This corresponds to a clocking rate of 640 kHz.

Positioning of the phase rotator after some
accumulation of the correlator output is acceptable
provided that no appreciable Doppler loss occurs during
that accumulation time. The loss may be easily evaluated

5   by examining the accumulator frequency response, $F(\omega)$,
thus:

$$F(\omega) = \frac{1}{N} \sum_{i=1}^{N} e^{ij\omega T} = \frac{\sin\frac{N\omega T}{2}}{N \sin\frac{\omega T}{2}}$$

10

For a maximum 1 dB loss therefore, at the maximum Doppler
frequency of 10 kHz, N may be no greater than 547.
Putting the phase rotator after this amount of

15   accumulation would result in the throughput rate of the
device being reduced from 20 MHz to approximately 40
kHz. Further accumulation may then be used to reduce the
output data rate to a sufficiently low value for handling
by a microprocessor. This would be in the order of 1

20   kHz. There is however one further aspect of the
configuration to be examined, that is, the required I and
Q word-lengths.

The number of bits required for the I and Q
digitisations will be application dependent. If a 2 dB

25   loss can be tolerated then single bit conversion will be
adequate. However if 2 bits are used this loss will be
reduced to 0.6 dB. These two cases assume that the
signal to noise ratio is negative. As progression is
made through the accumulation stages this will not always

30   be the case and more bits will become necessary.

The point at which phase rotation is effected
therefore will depend on the implementation of the
device. A 2 bit rotator operating at 20 MHz may be
placed directly before or after the correlator.

35   Alternatively a slower but greater word length rotator
may be used after a limited amount of post correlation
accumulation.

The phase rotator 53 comprises logic multipliers 54 and summers 55. Each of the digitised I & Q signals is separately multiplied by $\cos \omega T$ and $\sin \omega T$, which are themselves derived from a read-only-memory (ROM) 56 to which the NCO output word is applied. The multiplier outputs $I \cos \omega T$ and $Q \sin \omega T$ are summed to give a corrected vector I^1, likewise $Q \cos \omega T$ and $I \sin \omega T$ are summed to give Q^1. I^1 and Q^1 are then subjected to further, post phase rotation accumulation in accumulators 57a, 57b before being input to the channel processor (not shown). The primary function of the channel processor is to maintain track of the code and carrier phases.

Estimates of code position error may be made simply by differencing early and late correlation samples. These are derived by performing $I^2 + Q^2$ operations on early and late correlation outputs. It may be noted that in a digital implementation channel balance will no longer be a problem. The code position error estimates may then be applied to a software loop filter before being used to update the code generator (not shown), hence closing the code tracking loop.

Carrier phase estimates may be made by using a Costas I.Q. technique on the prompt correlation samples. The carrier loop will then be closed in a similar manner to the code loop. Carrier frequency estimates may also be made by performing an operation on time sequential I,Q pairs as shown below·

$$\text{Error frequency} \propto \frac{Q_i I_{i-1} - I_i Q_{i-1}}{I_i^2 + Q_i^2}$$

This error function may be used to assist initial carrier phase acquisition and may also be employed to give frequency estimates when severe jamming precludes use of the carrier phase tracking loop.

This configuration allows the addition of more receiver channels simply by the addition of extra code

generators, N.C.O's and PROMS. The same A/D module and channel processor may be used for the extra channels. A separate A/D conversion module will, however, be required if Ll and L2 are to be received simultaneously.

5   For a lower performance receiver channel the adaptive threshold 2 bit A/D converters may be replaced with single bit units. The correlator need only be a switched early/late type and so only requiring a single pair of I and Q outputs.

10   If simultaneous operation on a number of satellites, or on different signal segments of the same satellite is required, a number of the serial correlation blocks can be used in parallel.

15

20

25

30

35

CLAIMS:-

1.   A receiver for a Navstar satellite navigation system including amplification and down conversion to i.f. frequencies to produce quadrature signals,

5   analogue-to-digital converters to digitise separately the quadrature signals, local digital code generating means, means for correlating the digitised quadrature signals separately with the same locally generated digital codes, channel signal processing means to which the outputs of

10   the correlation means are applied, the processing means being arranged to control the code and carrier tracking of the receiver, and correction means responsive to control signals generated in the processing means to effect phase rotation of the baseband signal phasor

15   represented by the digitised quadrature signals to effect Doppler tracking in the receiver loop, characterised in that the correction means includes means for generating digital signals representing $\sin \omega T$ and $\cos \omega T$, where ωT is the required phase rotation angle, means for

20   multiplying each of the quadrature signals by the $\sin \omega T$ and $\cos \omega T$ signals separately and means for summing the multiplied signals according to the algorithm

$$I^1 = I \cos \omega T + Q \sin \omega T$$
$$Q^1 = Q \cos \omega T - I \sin \omega T$$

25   where I and Q are the digitised quadrature signals.

2.   A receiver according to claim 1 characterised in that the means for generating the digital signals representing $\sin \omega T$ and $\cos \omega T$ comprises a numerically controlled oscillator (NCO) to which a digital signal

30   representative of the phase rotation frequency required to effect Doppler tracking is applied, the output of the oscillator being a digital representation of a phase angle ωT applied to a read-only memory (ROM) containing values of $\sin \omega T$ and $\cos \omega T$ for different phase angles ωT.

35   3.   A receiver according to claim 2 characterised in that the numerically controlled oscillator (NCO) comprises a clocked shift register acting as an

0155776

accumulator to which is fed a digital word representing
the phase rotation frequency, the output phase rotation
angle being a shorter digital word taken from
intermediate stages of the accumulator.

5   4.   A receiver according to claim 1 or 2
characterised in that the receiver further includes
partial accumulation means for the correlated I & Q
digitised quadrature signals preceding the correction
means and further accumulation means for the I' and Q'

10   signal outputs of the correction means.

       5.   A receiver for a NAVSTAR satellite navigation
system substantially as described with reference to Figs.
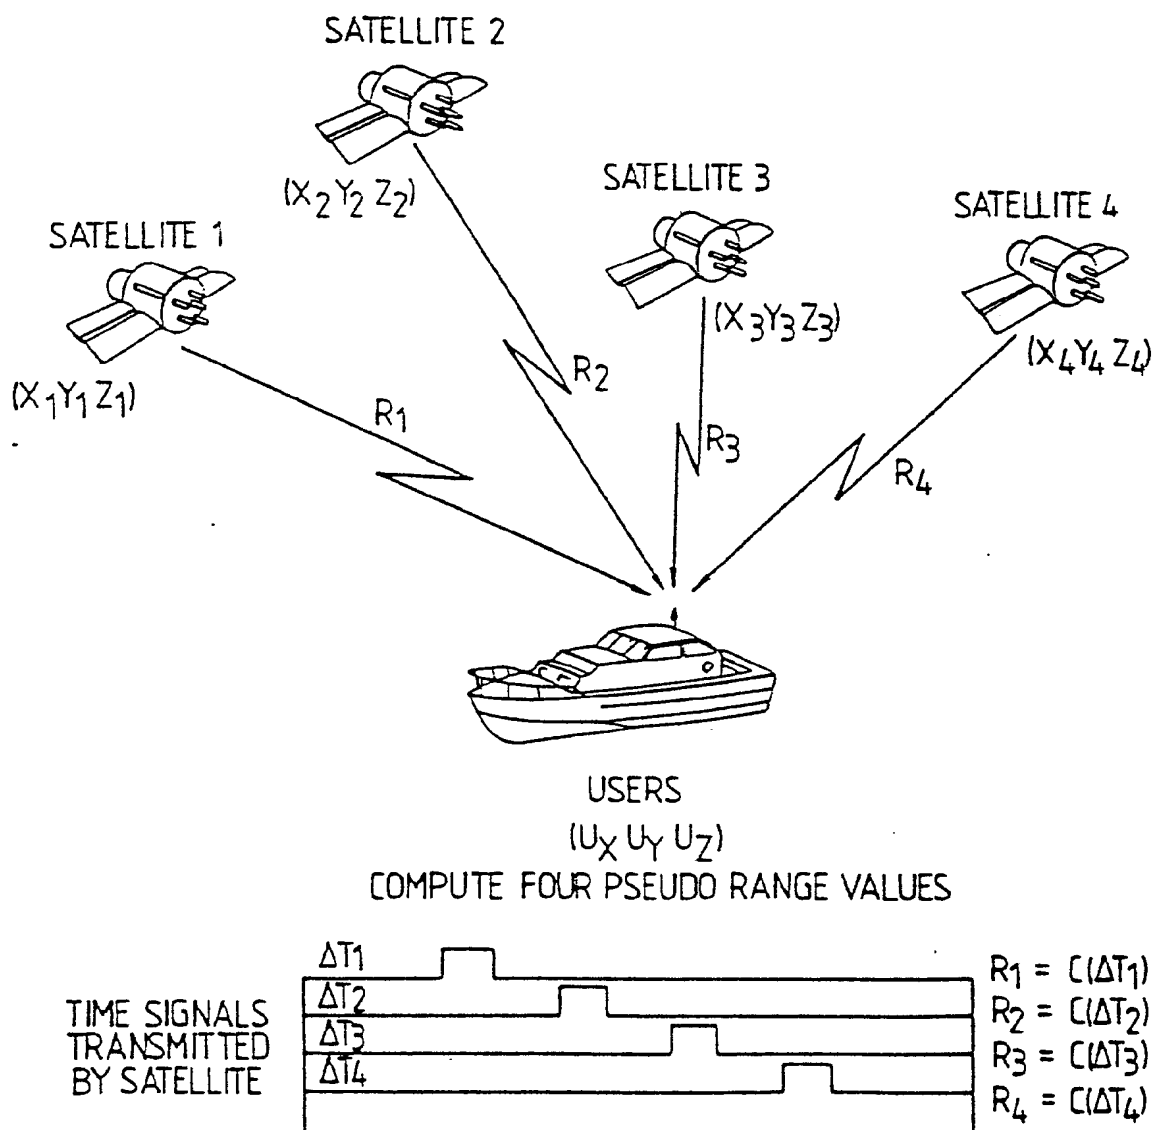5 & 6 of the accompanying drawings.

15

20

25

30

35

1

SATELLITE 2

$(X_2 Y_2 Z_2)$

SATELLITE 3

SATELLITE 1

SATELLITE 4

$(X_3 Y_3 Z_3)$

$(X_1 Y_1 Z_1)$

$(X_4 Y_4 Z_4)$

R_2

R_1

R_3

R_4

USERS

$(U_X U_Y U_Z)$

COMPUTE FOUR PSEUDO RANGE VALUES

TIME SIGNALS
TRANSMITTED
BY SATELLITE

ΔT_1

ΔT_2

ΔT_3

ΔT_4

$R_1 = C(\Delta T_1)$

$R_2 = C(\Delta T_2)$

$R_3 = C(\Delta T_3)$

$R_4 = C(\Delta T_4)$

Fig.1.

2

$$(X_1 - \bigcirc\!\!\!\!\!U_X \quad)2 + (Y_1 - \bigcirc\!\!\!\!\!U_Y \quad)2 + (Z_1 - \bigcirc\!\!\!\!\!U_Z \quad)2 = (R_1 - \bigcirc\!\!\!\!\!C_B \quad)^2$$

$$(X_2 - \bigcirc\!\!\!\!\!U_X \quad)2 + (Y_2 - \bigcirc\!\!\!\!\!U_Y \quad)2 + (Z_2 - \bigcirc\!\!\!\!\!U_Z \quad)2 = (R_2 - \bigcirc\!\!\!\!\!C_B \quad)^2$$

$$(X_3 - \bigcirc\!\!\!\!\!U_X \quad)2 + (Y_3 - \bigcirc\!\!\!\!\!U_Y \quad)2 + (Z_3 - \bigcirc\!\!\!\!\!U_Z \quad)2 = (R_3 - \bigcirc\!\!\!\!\!C_B \quad)^2$$

$$(X_4 - \bigcirc\!\!\!\!\!U_X \quad)2 + (Y_4 - \bigcirc\!\!\!\!\!U_Y \quad)2 + (Z_4 - \bigcirc\!\!\!\!\!U_Z \quad)2 = (R_4 - \bigcirc\!\!\!\!\!C_B \quad)^2$$

Fig.2.

L-BAND — R.F. — $\otimes$ — I.F. — $\otimes$ — Z.I.F. — $\otimes$ — A/D — $\otimes$ — μP — LOOP CONTROL

1st I.F.

2nd I.F.

BASEBAND ANALOGUE

BASEBAND DIGITAL

POSSIBLE POSITIONS OF CODE AND CARRIER (DOPPLER) INJECTIONS
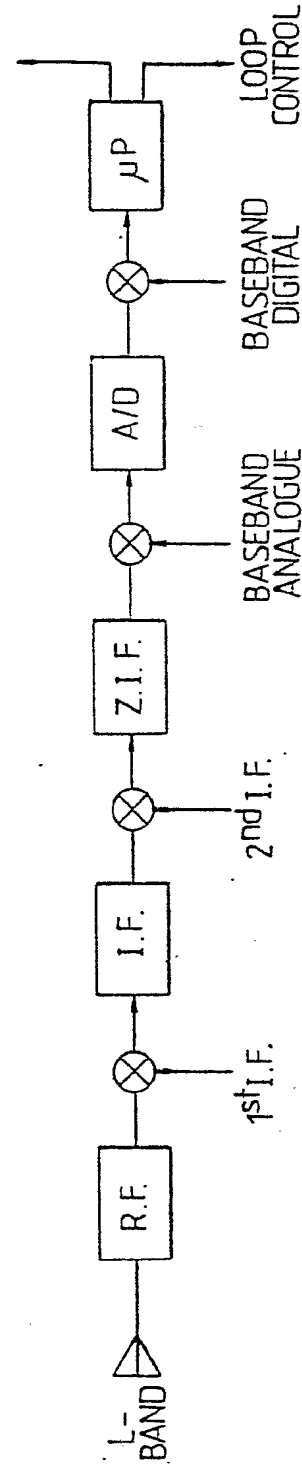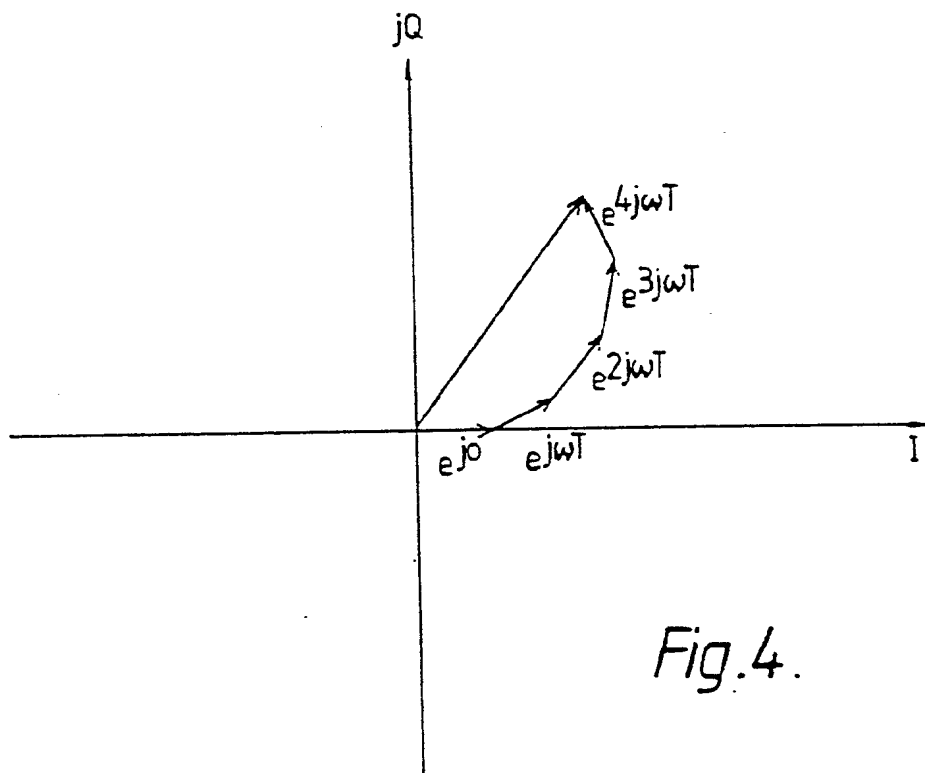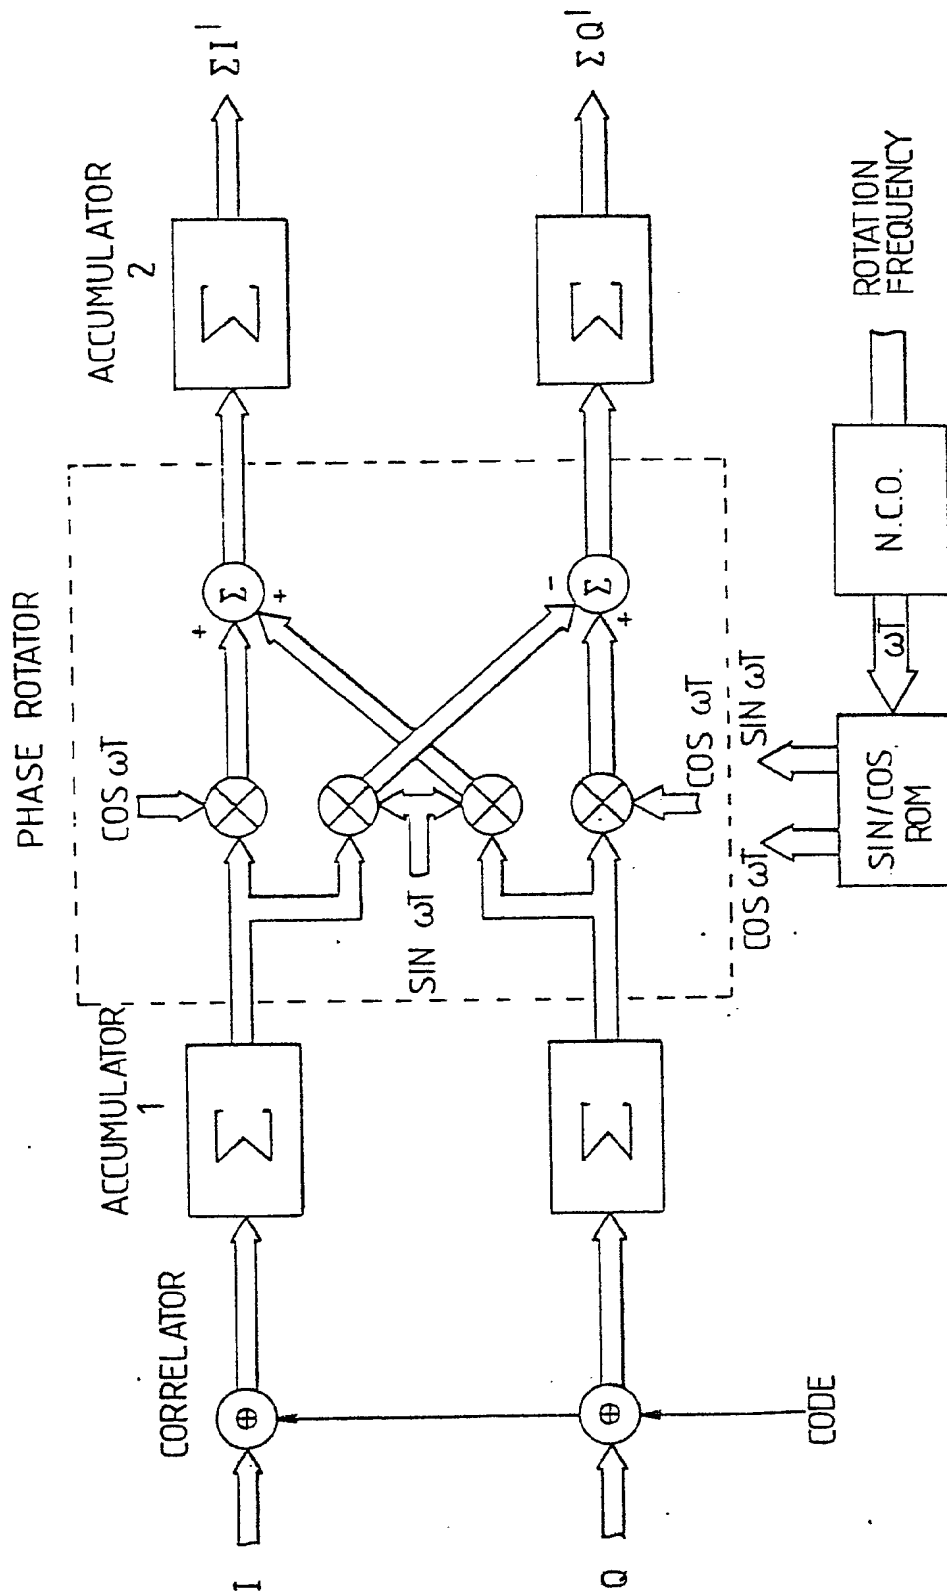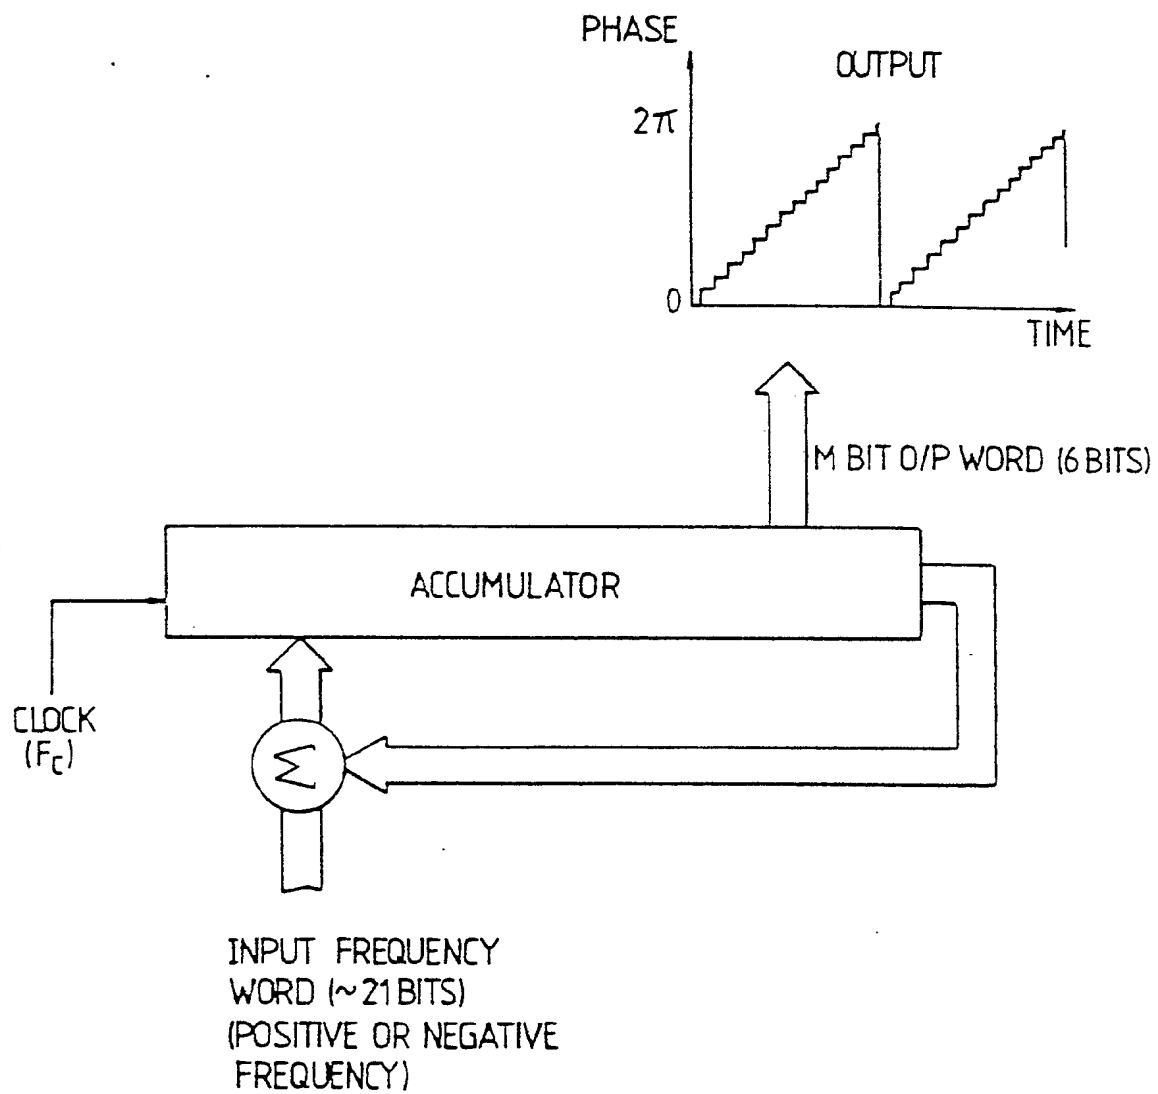
Fig.3.

3

Fig.4.

4

Fig.5.

5

Fig.6.

European Patent
Office

EUROPEAN SEARCH REPORT

0155776

Application number

EP 85 30 1261

DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int Cl 4)
Y	FR-A-2 522 413 (MACROMETRICS) * Page 20, line 19 - page 26, line 8; page 26, line 28 - page 27, line 27; page 29, lines 2-29; page 35, line 25 - page 38, line 27; figures 4,5,7-9 *	1-3,5	G 01 S 5/14 G 01 S 11/00
Y	EP-A-0 091 167 (PHILIPS) * Page 6, line 4 - page 7, line 14; page 17, line 26 - page 25, line 34; figures 1,4-7 *	1-3,5	
A		4	
A	PROCEEDINGS OF THE IEE part F, vol. 127, no. 2, April 1980, pages 163-167, Stevenage, GB; P.K. BLAIR: "Receivers for the NAVSTAR global positioning system" * Whole document *	1,5	
A	US-A-3 971 996 (D.M. MOTLEY et al.) * Column 5, line 31 - column 7, line 45; column 15, line 25 - column 16, line 30; column 18, lines 6-48; figures 3,4,6 *	1	

TECHNICAL FIELDS SEARCHED (Int. Cl.4)
G 01 S   H 04 B   H 04 L

-/-

The present search report has been drawn up for all claims

Place of search	Date of completion of the search	Examiner
THE HAGUE	06-06-1985	VAN WEEL E.J.G.

European Patent Office

EUROPEAN SEARCH REPORT

	DOCUMENTS CONSIDERED TO BE RELEVANT		Page 2
Category	Citation of document with indication where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int Cl 4)
A	MILITARY MICROWAVES CONFERENCE PROCEEDINGS, October 25-27, 1978, London, GB, pages 61-74, Microwave Exhibitionss and Publishers Ltd., Sevenoaks, Kent, GB; F. PERGAL et al.: "Factors affecting pseudonoise system design in microwave satellite communications" * Whole document *	1,5	

			TECHNICAL FIELDS SEARCHED (Int Cl.4)
	The present search report has been drawn up for all claims		

Place of search THE HAGUE	Date of completion of the search 06-06-1985	Examiner VAN WEEL E.J.G.

CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone
Y : particularly relevant if combined with another document of the same category
A : technological background
O : non-written disclosure
P : intermediate document

T : theory or principle underlying the invention
E : earlier patent document, but published on, or after the filing date
D : document cited in the application
L : document cited for other reasons

& : member of the same patent family, corresponding document